


# Coaxial Broadband Amplifiers up to 110 GHz

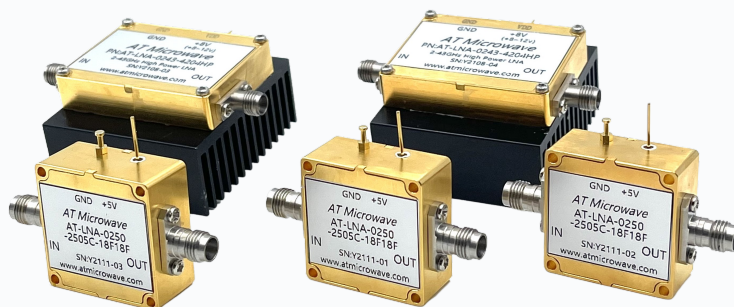

## TECHNICAL SPECIFICATIONS

- **Frequency Range**  
DC to 110 GHz maximum coverage (multiple configurations available)
- **Amplifier Types**  
Low-Noise Amplifier (LNA) configurations for sensitive receiver applications
- **Power Amplifiers**  
HPA designs for transmit-side signal conditioning
- **Connectors**  
Coaxial SMA and precision connectors for broadband impedance matching
- **Form Factor**  
Compact designs with rapid integration timelines
- **Customization**  
Custom specifications available upon request for specialized applications