


Magic Tee up to 325 GHz

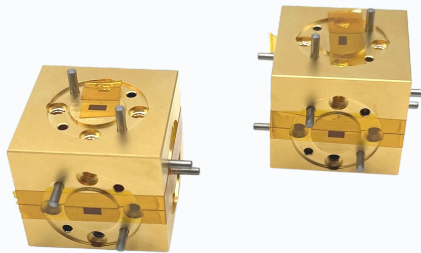

TECHNICAL SPECIFICATIONS

- **Frequency Range**
WR2300 down to WR3 waveguide standards, up to 325 GHz
- **Configuration Options**
E-Plane and H-Plane Tee designs
- **Insertion Loss**
Low insertion loss across the entire frequency band
- **VSWR**
Minimal deviation for stable impedance matching
- **Construction**
Robust waveguide design for field deployment